


EST WT: 65-149 LBS (DEPENDING ON HP AND OPTIONS)

STANDARD FEATURES:
 PAINTED THREE PHASE, TEFC, 220/440/60 ELECTRIC MOTOR
 HELICAL GEARBOX - 5:1 REDUCTION RATIO
 350 RPM NOMINAL OUTPUT
 TOTE CAP MOUNT WITH TIE ROD MOUNTING KIT
 316SS WETTED PARTS
 1" X 36" FMB SHAFT
 SINGLE OR DUAL FOLDING IMPELLERS
 WITH SET SCREW ATTACHMENT

OPTIONS:
 SINGLE PHASE TEFC MOTOR
 PREWIRED W/ SWITCH, CORD AND 110V PLUG
 SINGLE SPEED EXPLOSION PROOF MOTOR
 32 Ra FINISH ON ALL WETTED PARTS

INCLUDES TIE ROD
 MOUNTING KIT FOR
 ADDED STABILITY

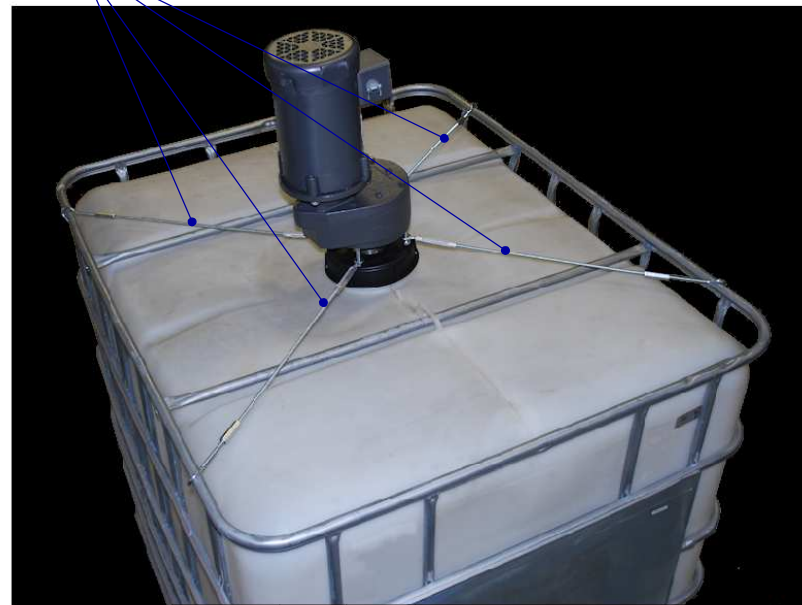

DRAWN	JDF	6/11/13
CHECKED	PIC	6/11/13
PROPRIETARY AND CONFIDENTIAL		

THE INFORMATION CONTAINED IN THIS
 DRAWING IS THE SOLE PROPERTY OF FUSION
 FLUID EQUIPMENT LLC. ANY REPRODUCTION IN
 PART OR AS A WHOLE WITHOUT THE WRITTEN
 PERMISSION OF FUSION FLUID EQUIPMENT LLC IS
 PROHIBITED.

WHILE FUSION FLUID EQUIPMENT LLC
 STRIVES TO MAINTAIN THE INTEGRITY OF A
 DESIGN AS APPROVED, FUSION FLUID
 EQUIPMENT LLC RETAINS THE RIGHT TO MAKE
 MODIFICATIONS DURING THE MANUFACTURING
 PROCESS TO IMPROVE FIT, FORM, AND
 FUNCTION OF THE DESIGN WITHOUT CUSTOMER
 NOTIFICATION OR CONSENT.

UNLESS OTHERWISE SPECIFIED:
 DIMENSIONS ARE IN INCHES.
 NO TOLERANCE IS IMPLIED.
 DO NOT SCALE DRAWING

FusionExpress Mixing Equipment		
-----------------------------------	--	--

TITLE:
 TOTE CAP MOUNTED TOTE MIXER
 GEAR DRIVE ELECTRIC

SIZE	DWG. NO.	REV
A	SALES-BG-#J-#	A
SCALE: 1:16	WEIGHT:	SHEET 1 OF 1