


STANDARD FEATURES:
 PAINTED AIR MOTOR WITH MUFFLER
 HELICAL GEARBOX - 5:1 RATIO
 TOTE CAP MOUNT WITH TIE ROD KIT
 316SS WETTED PARTS
 1" X 36" FMB SHAFT
 SINGLE OR DUAL MARINE IMPELLERS
 WITH SET SCREW ATTACHMENT
 SPEED CONTROL VALVE

OPTIONS:
 FILTER, LUBRICATOR, AND REGULATOR (FLR)
 32Ra FINISH ON ALL WETTED PARTS

AIR CONSUMPTION	
1 HP	40 CFM @ 80 PSI
2 HP	60 CFM @ 70 PSI
3 HP	90 CFM @ 100 PSI

INCLUDES TIE ROD MOUNTING KIT FOR ADDED STABILITY

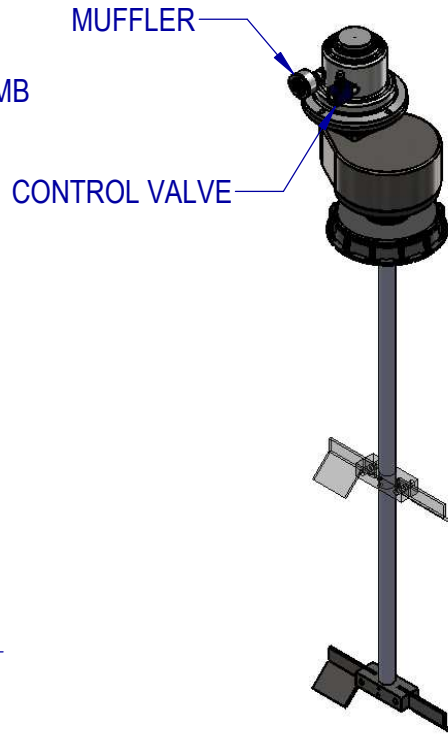

EST. WT.: 51-67 LBS (DEPENDING ON HP AND OPTIONS)

	NAME	DATE
DRAWN	JDF	6/11/13
CHECKED	PIC	6/11/13

FusionExpress
 Mixing Equipment

PROPRIETARY AND CONFIDENTIAL
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF FUSION FLUID EQUIPMENT LLC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF FUSION FLUID EQUIPMENT LLC IS PROHIBITED.

TITLE:
 TOTE CAP MOUNTED TOE MIXER GEAR DRIVE AIR MOTOR

UNLESS OTHERWISE SPECIFIED:
 DIMENSIONS ARE IN INCHES.
 NO TOLERANCE IS IMPLIED.
 DO NOT SCALE DRAWING

WHILE FUSION FLUID EQUIPMENT LLC STRIVES TO MAINTAIN THE INTEGRITY OF A DESIGN AS APPROVED, FUSION FLUID EQUIPMENT LLC RETAINS THE RIGHT TO MAKE MODIFICATIONS DURING THE MANUFACTURING PROCESS TO IMPROVE FIT, FORM, AND FUNCTION OF THE DESIGN WITHOUT CUSTOMER NOTIFICATION OR CONSENT.

SIZE	DWG. NO.	REV
A	SALES-BGA-#J	A
SCALE: 1:16	WEIGHT:	SHEET 1 OF 1