
STANDARD FEATURES:
PAINTED, TEFC, 220/440/60 ELECTRIC MOTOR
ADJUSTABLE BRIDGE MOUNT
316SS WETTED PARTS
3/4" X 36"FMB SHAFT
SINGLE OR DUAL MARINE TYPE IMPELLERS
WITH SET SCREW ATTACHMENT

OPTIONS:
SINGLE PHASE TEFC MOTOR
PREWIRED W TOGGLE SWITCH, CORD AND 110V PLUG
SINGLE SPEED EXPLOSION PROOF MOTOR
32 Ra FINISH ON ALL WETTED PARTS
FORK LIFT CHANNELS
TOTE CAP WITH VITON FLOATING SEAL

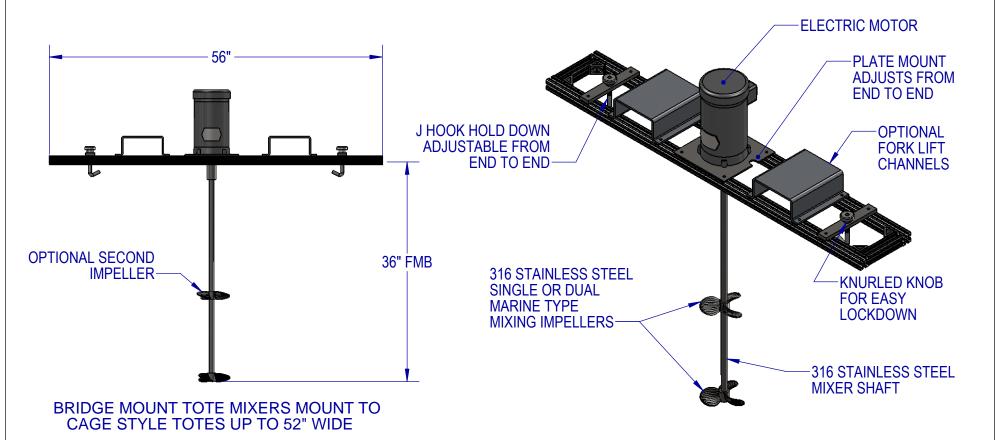

	NAME	DATE	
DRAWN	JDF	6/10/13	Europa Evoropa
CHECKED	PIC	6/10/13	Fusion Express
PROPRIETARY AND CONFIDENTIAL			Mixing Equipment
THE INFORMATION C DRAWING IS THE SOL FLUID EQUIPMENT LL PART OR AS A WHOL PERMISSION OF FUSIO PROHIBITED.	E PROPERTY OF ANY REPROPERTY OF ANY REPROPERTY OF ANY REPROPERTY.	OF FUSION DUCTION IN IE WRITTEN	BRIDGE MOUNT TOTE MIXER DIRECT DRIVE ELECTRIC

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES.
NO TOLERANCE IS IMPLIED.

DO NOT SCALE DRAWING

NOTIFICATION OF THE DESIGN WITHOUT CUSTOMER

NOTIFICATION OR CONSENT.

WHILE FUSION FUSION FLUID EQUIPMENT LLC
STRIVES TO MAINTAIN THE INTEGRITY OF A
DESIGN AS APPROVED, FUSION FLUID
EQUIPMENT LIC RETAINS THE RIGHT TO MAKE
MODIFICATIONS DURING THE MANUFACTURING
PROCESS TO IMPROVE FIT, FORM, AND
FUNCTION OF THE DESIGN WITHOUT CUSTOMER

SIZE DWG. NO. REV

SALES-BD-#T-# A

SCALE: 1:16 WEIGHT: SHEET 1 OF 1