
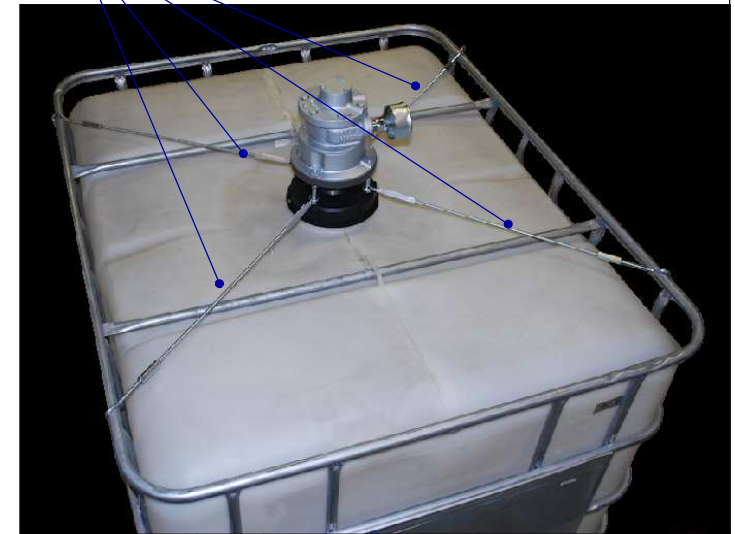


STANDARD FEATURES:
 PAINTED AIR MOTOR WITH MUFFLER
 TOTE CAP MOUNT WITH TIE ROD KIT
 316SS WETTED PARTS
 3/4" X 36" FMB SHAFT
 SINGLE OR DUAL MARINE IMPELLERS
 WITH SET SCREW ATTACHMENT
 SPEED CONTROL VALVE

OPTIONS:
 FILTER, LUBRICATOR, AND REGULATOR (FLR)
 32 Ra FINISH ON ALL WETTED PARTS

INCLUDES TIE ROD
 MOUNTING KIT FOR
 ADDED STABILITY

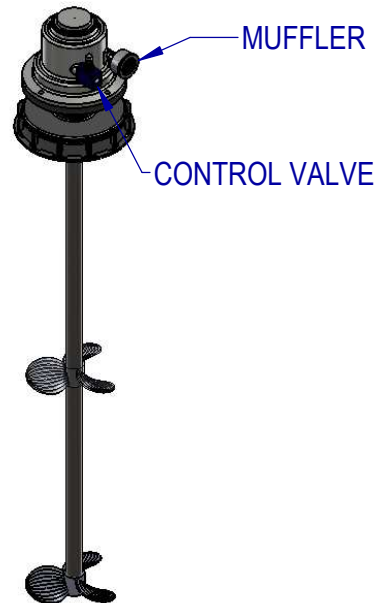

AIR CONSUMPTION	
1 HP	40 CFM @ 80 PSI
2 HP	60 CFM @ 70 PSI
3 HP	90 CFM @ 100 PSI

EST WT: 25-41 LBS (DEPENDING ON HP AND OPTIONS)

	NAME	DATE
DRAWN	JDF	9/27/12
CHECKED	PIC	9/27/12

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF FUSION FLUID EQUIPMENT LLC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF FUSION FLUID EQUIPMENT LLC IS PROHIBITED.

WHILE FUSION FLUID EQUIPMENT LLC STRIVES TO MAINTAIN THE INTEGRITY OF A DESIGN AS APPROVED, FUSION FLUID EQUIPMENT LLC RETAINS THE RIGHT TO MAKE MODIFICATIONS DURING THE MANUFACTURING PROCESS TO IMPROVE FIT, FORM, AND FUNCTION OF THE DESIGN WITHOUT CUSTOMER NOTIFICATION OR CONSENT.

UNLESS OTHERWISE SPECIFIED:
 DIMENSIONS ARE IN INCHES.
 NO TOLERANCE IS IMPLIED.
 DO NOT SCALE DRAWING



TITLE:
**TOTE CAP MOUNTED TOTE MIXER
 DIRECT DRIVE AIR MOTOR**

SIZE	DWG. NO.	REV
A	SALES-BDA-#J	A
SCALE: 1:12	WEIGHT:	SHEET 1 OF 1